



Specifications

Wattage	60W / 80W / 100W Tunable
LED Chip	SMD 3030, Lumileds
Driver Brand	Meanwell / SOSEN / ZHIHE
CCT	3000K / 4000K / 5000K Tunable
Light Output	7800lm / 10400lm / 13000lm
Efficacy	130 LM/W
AC Input Voltage	100~277V / 120-347V / 277-480V Optional
Light Distribution	Type V
Exclusive Feature(1)	Photocell Optional
Exclusive Feature(2)	PC Diffuser Optional
Exclusive Feature(3)	3CCT / Power Tunable
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)
Total Harmonic Distortion (THD)	<20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years


Features



CCT Select



Power Select



Photocell sensor



ADC12 Die casting


Button Photocell Sensor (Optional)



CCT Select & Power Select



Dimension

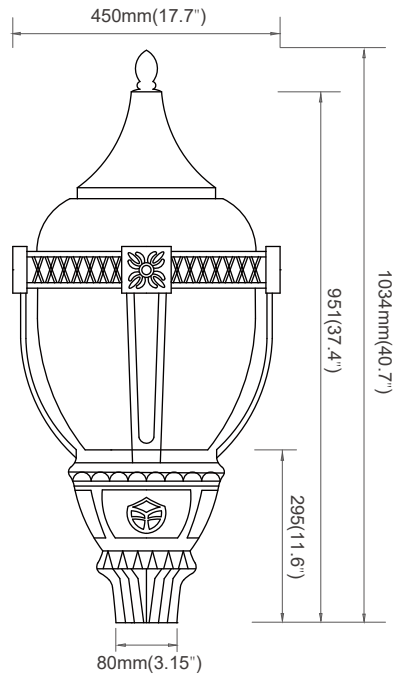

Applications




Street / Walkway




Community

Light Distribution

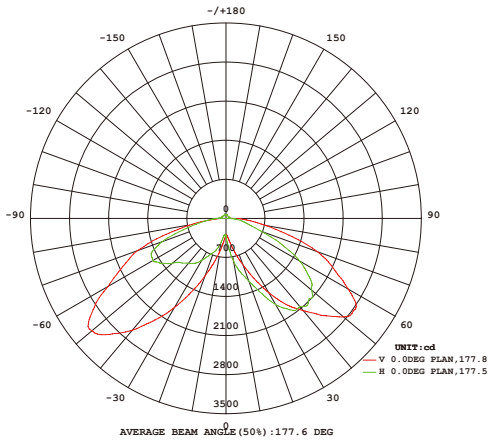

Installation

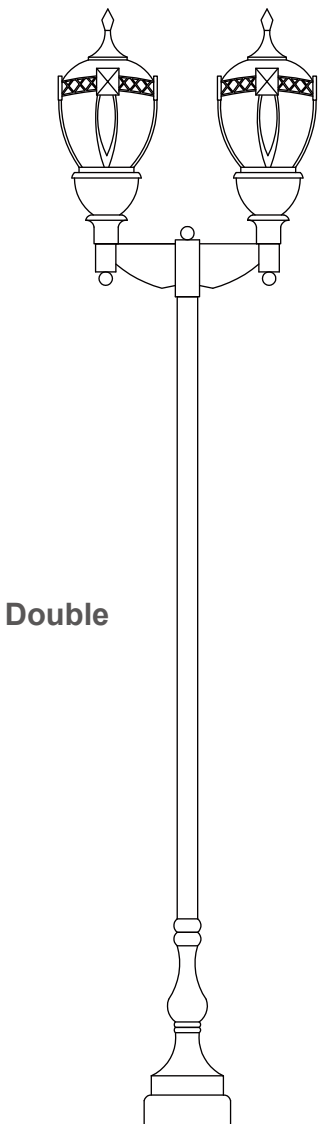

Double



Single

Packaging information

Wattage/J	Carton Box Dimension (mm/in)	N.W (kg/lbs) (1pc)	G.W (kg/lbs) (1ctn)	Qty/ctn
JNY-ACO-FJ13J-SW	540 x 540 x 980 mm 21.5 x 21.5 x 39.0 in	10kg(22.0lbs)	12.5kg(28.0lbs)	1 pc

