

LED MINI WALL PACK WIH-PBC-25327-SW




Certification



Specifications


Model	WiH-PBC-25327-SW
Wattage	15W-20W-25W
Dimming	0-10V
Lumen Output	1800-2400-3000Lm
Input Voltage	AC100-277V 50/60Hz
CCT	3000K-4000K-5000K Selectable
CRI	Ra>80
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C
Environment Location	WET LOCATIONS (IP66)
Lens	Clear Stripped
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours
Lamp Shell	Bronze
Accessories Option	PC: Photocell Control Pre-Installed
DLC ID	S-K4BGAD
PCS/BOX	10
Master Box Dimension	L390*W335*H245mm / 15.35"x13.18"x9.65"
Master Box Weight	7.1KG / 15.65LB

Dimension

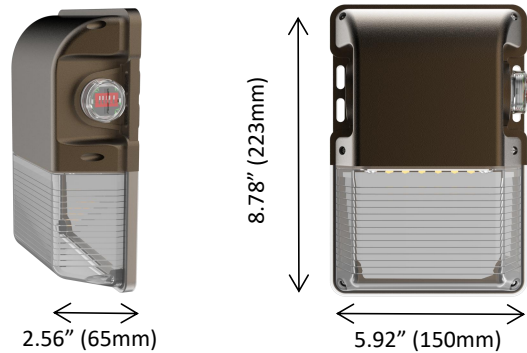

Feature


The transparent cover on the side can be screwed off easily.

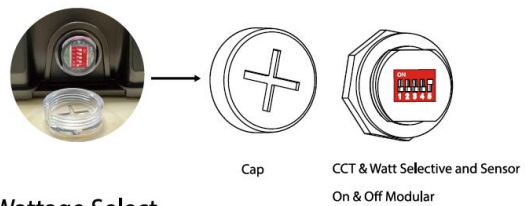

Wattage Select



Photocell



CCT Select

